
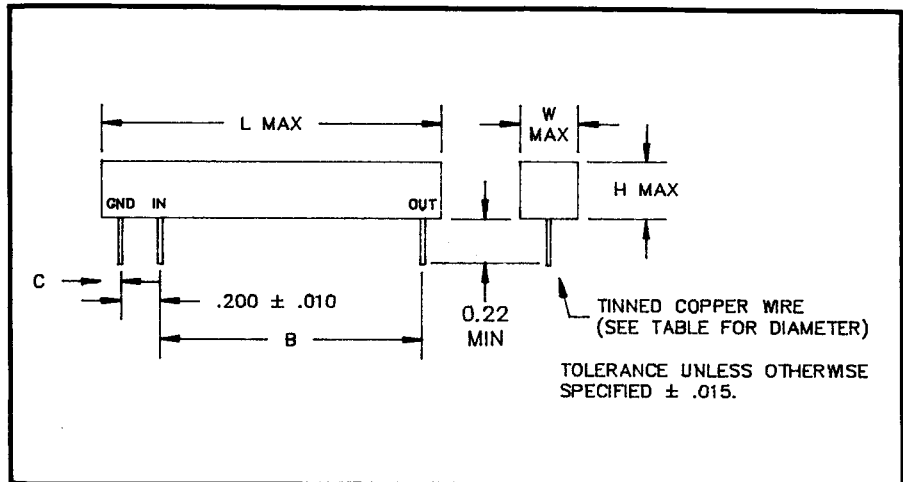


### DISTRIBUTED CONSTANT DELAY LINES

• T.C. of Delay: 500 ppm/°C, standard  
300 ppm/°C, fast

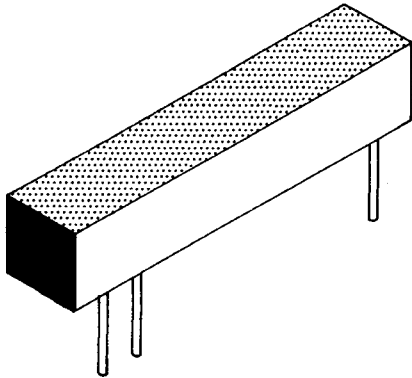

	PART NUMBER	DELAY (ns) ±10%	NOMINAL INPUT RISE TIME (ns)	NOMINAL OUTPUT RISE TIME (ns)	DIMENSIONS (Inches)					LEAD DIA. ±.002	ATTEN. MAX
					L MAX	W MAX	H MAX	B±.015	C±.015		
200 OHMS ±10%	TK-20-0010	10	8	9	.765	.25	.28	.40	.075	.020	5%
	TK-20-0020	20	8	10	1.015	.25	.28	.60	.10	.020	5%
	TK-20-0030	30	9	12	1.015	.25	.28	.60	.10	.020	5%
	TK-20-0040	40	9	13	1.015	.25	.28	.60	.10	.020	5%
	TK-20-0050	50	9	15	1.015	.25	.28	.60	.10	.020	5%
	TK-20-0080	80	9	20	1.265	.25	.28	.85	.10	.020	5%
TK-20-0100	100	9	22	1.515	.25	.28	1.10	.10	.020	5%	
500 OHMS ±10%	TK-50-0010	10	8	9	.515	.31	.28	.125	.075	.020	5%
	TK-50-0015	15	8	9.5	.615	.31	.28	.25	.075	.020	5%
	TK-50-0025	25	8	11	.615	.31	.28	.25	.075	.020	5%
	TK-50-0050	50	8	14	.765	.31	.28	.40	.075	.020	5%
	TK-50-0075	75	8	18	.765	.31	.28	.40	.075	.020	5%
	TK-50-0100	100	10	25	.765	.31	.28	.40	.075	.020	5%
	TK-50-0150	150	10	35	.895	.31	.28	.50	.09	.020	5%
	TK-50-0250	250	20	80	1.015	.31	.28	.60	.10	.020	5%
TK-50-0500	500	95	170	1.265	.31	.28	.85	.10	.020	10%	
TK-50-1000	1000	110	215	1.765	.31	.28	1.35	.075	.025	15%	
1000 OHMS ±10%	TK-100-0050	50	14	18	.765	.31	.28	.40	.075	.020	5%
	TK-100-0075	75	14	23	.765	.31	.28	.40	.075	.020	5%
	TK-100-0100	100	14	35	.765	.31	.28	.40	.09	.020	5%
	TK-100-0150	150	28	55	.895	.31	.28	.50	.10	.020	5%
	TK-100-0250	250	17	60	1.015	.31	.28	.60	.10	.020	10%
TK-100-0500	500	120	185	1.015	.31	.31	.60	.10	.020	10%	
500 OHMS ±10% FAST RISE TIME	TK-50-0050-F	50	10	13	1.015	.25	.28	.60	.10	.020	5%
	TK-50-0075-F	75	10	15	1.265	.25	.28	.85	.10	.020	5%
	TK-50-0100-F	100	9	17	1.515	.25	.28	1.10	.10	.020	5%
	TK-50-0200-F	200	9	35	1.765	.31	.31	1.35	.10	.032	5%
	TK-50-0500-F	500	24	75	3.015	.44	.44	2.60	.10	.032	10%
	TK-50-0750-F	750	25	95	3.515	.44	.44	3.10	.10	.032	15%
	TK-50-1000-F	1000	25	100	4.515	.44	.44	4.10	.10	.032	15%